


MATERIAL LIST


ALL PVC WILL BE SCHEDULE 80 AND THREADED

1. 1-1/4" POLYETHYLENE PRESSURE PIPE SDR 11
1 - CARSON JUMBO BOX (PART #1730)
 - * 2. 1 - CARSON JUMBO BOX (PART #1730)
 - * 3. 1 - CARSON LID #1730 MARKED "SEWER"
 4. 1-1/4" X 3" NIPPLE PVC
 5. 2 - 1-1/4" UNION BALL VALVE PVC
 6. 2 - 1-1/4" UNION BALL VALVE PVC
 7. 2 - 1-1/4" FEMALE PIPE THREAD X HUB ADAPTER
 8. 2 - 1-1/4" 45° BENDS
 9. 1 - 1 1/4" WYE
- * STREET USE REQUIRES FOGTITE #2 CONCRETE BOX AND TRAFFIC BEARING LID (H-20 LOADING)

ALL PVC WILL BE SCHEDULE 80 AND THREADED

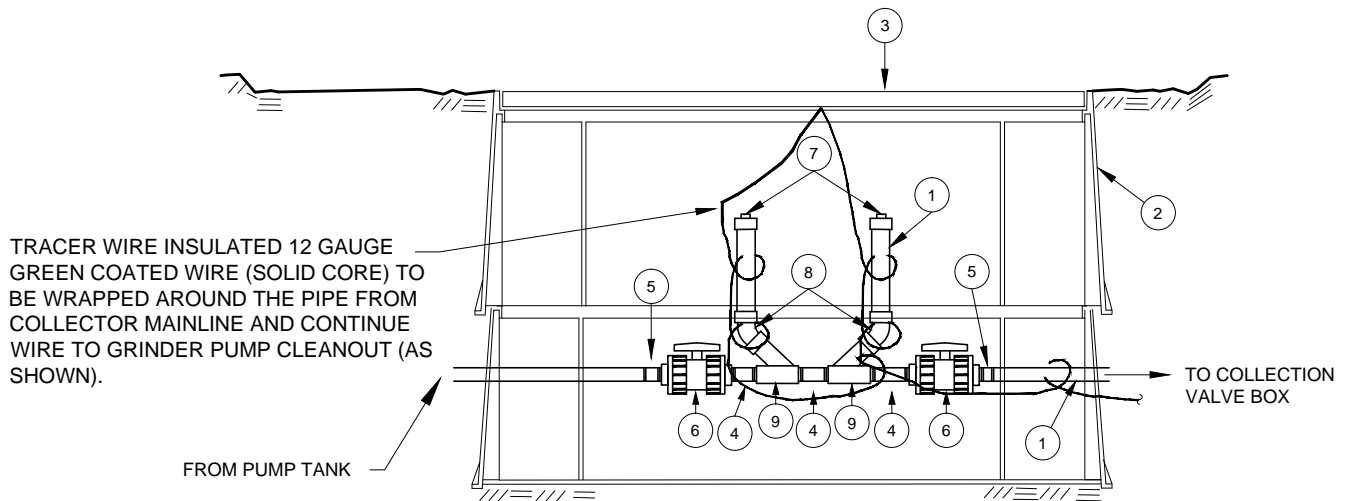

GRINDER PUMP VALVE BOX CLEAN-OUT DETAIL-NEAR PUMP TANK

 City of Bremerton <hr/> PUBLIC WORKS <hr/> DESIGN/CONSTRUCTION STANDARDS	GRINDER PUMP VALVE BOX CLEAN-OUT STANDARD	6119
		Revision Date 03/17/15

Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.