


SEC SINGLE FUSED CONNECTOR KIT - MODEL SEC 1791-SF

For Copper or Aluminum Stranded Wire

Fused, quick-disconnect type kit low-voltage copper or aluminum conductor cables. Recommended for street, highway, and flood lighting outdoor locations in either wet or dry areas. The Model SEC 1791-SF kits are designed to fit most conductors from number 12 to 4 stranded wire. Conductors are attached with simple screw lugs for easy, quick installation. Conductors can be removed and reinstalled. Any standard midget, ferrule-type fuse (except glass tube) may be used in this connector kit. Fuse dimensions are 13/32" diameter by 1-1/2" length. SEC fused connectors are designed for 600 volts or less. Maximum fuse rating for this unit is 30 AMP.

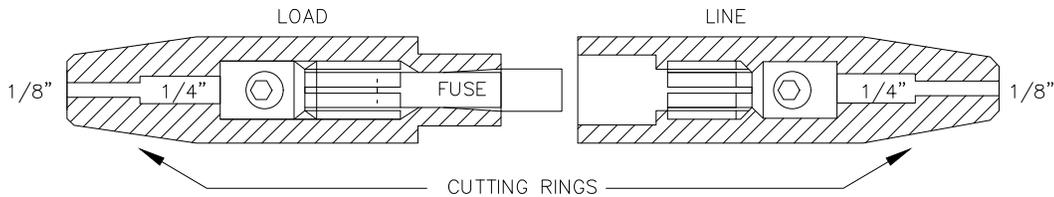

LISTED
SINGLE FUSED CONNECTOR KIT
9D70

PARTS LISTS

SEC 1791-SF	Single-Fused Kit Complete
SEC 1791-DS-3	Load Fuse Body
SEC 1791-DS-4	Load and Line Fuse Holder (2 per Kit)
SEC 1791-SF-6	Line Fuse Body

REQUIRED TORQUE INCH POUNDS

CAT NO.	WIRE SIZE	WIRE TYPE	WIRE DIA RANGE IN.	CUTTING RING NO.	TORQUE (IN-LBS)
1791-DS-3 1791-DS-4 1791-SF-6	8	RHH, RHW-2, THW, TW, USE-2, XHHW	15/64	1	60
	6	RHH, RHW-2, THHN, THW, THWN, USE-2, XHHW-2	19/64	1	60
	4	THHN, THW, THWN	5/16	1	60
	4	RHH, RHW-2, USE-2, XHHW-2	23/64	2	60

ORDERING INSTRUCTIONS

The same fused connector kit will fit most conductor sizes from numbers 12 to 4 stranded or solid wire.



City of Bremerton

PUBLIC WORKS

ENGINEERING DIVISION

**SEC SINGLE FUSED CONNECTOR
KIT
MODEL SEC 1791-SF**

7004

Revision Date
8/01/17