



INSTALL PRECAST GRADE RINGS, RISERS OR LEVELING BRICKS AS NECESSARY TO MATCH FINAL GRADE.

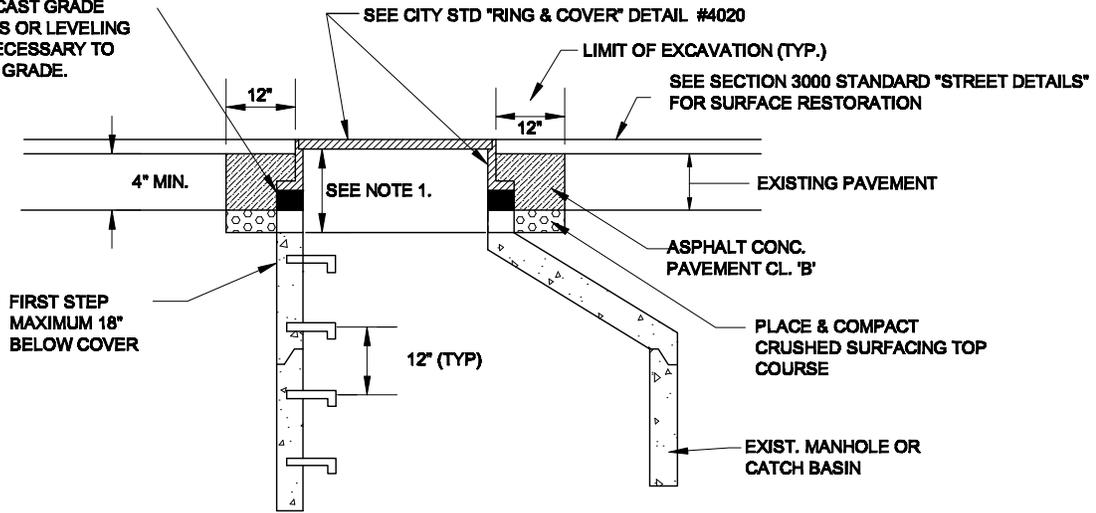

PAVED AREAS
NTS

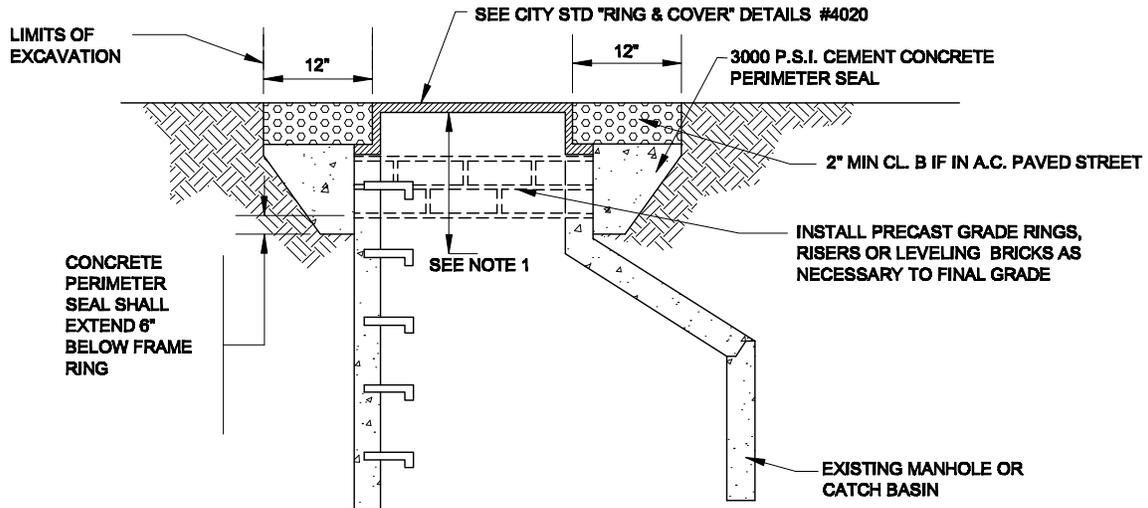

UNPAVED AREAS
NTS

NOTES:

1. WHERE DEPTH OF NECK EXCEEDS 24 INCHES, ADJUST MANHOLE/CATCH BASIN TO GRADE BY INSERTING NEW CONCRETE RISER SECTION(S) BETWEEN THE CONE/SLAB AND EXISTING BARREL.
2. RISER SECTIONS AND BRICK SHALL BE CONCRETE, GROUTED WITH 3/4" THICK NON-SHRINK GROUT SMOOTH INSIDE AND OUT.
3. STEPS OR HAND HOLDS SHALL BE ADDED AS NEEDED.
4. PRECAST GRADE RINGS AND RISERS MUST BE CAST WITH GROOVE TO ALLOW FIELD INSTALLATION OF SAFETY STEP.
5. REPLACE EXISTING RING AND COVER IF NON-STANDARD.



City of Bremerton

PUBLIC WORKS

DESIGN/CONSTRUCTION STANDARDS

**RING AND COVER
INSTALLATION**

Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.

4021

Revision Date
2/5/07