


FOLIAGE AT MATURITY AND BERM IF ANY SHALL NOT EXCEED 36" IN HEIGHT

A VISUAL CLEARANCE FROM THE STREET TO 11' IN HEIGHT SHALL BE MAINTAINED WITH ALL TREE FOLIAGE WITHIN THE SITE TRIANGLE

MINIMUM GUIDELINES


POSTED SPEED LIMIT	DESIGN SPEED	MINIMUM X
25	30	200'
30	35	250'
35	40	325'
40	45	400'
45	50	475'
50	55	550'
55	60	650'

PUBLIC STREET

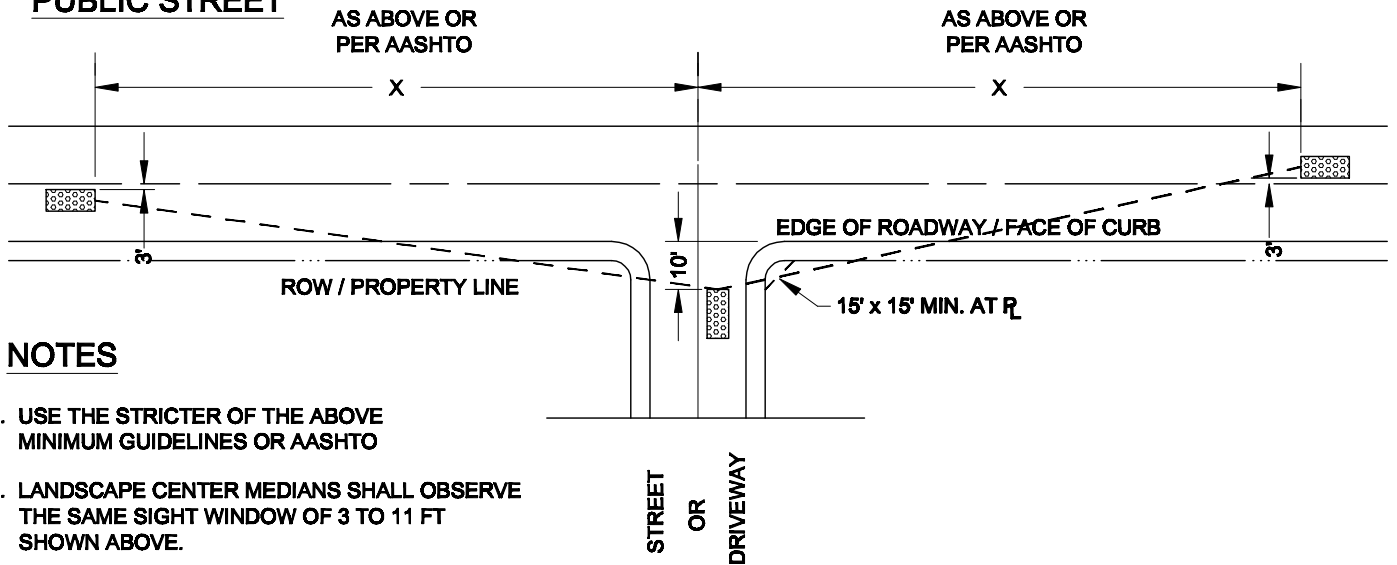

NOTES

1. USE THE STRICTER OF THE ABOVE MINIMUM GUIDELINES OR AASHTO
2. LANDSCAPE CENTER MEDIANS SHALL OBSERVE THE SAME SIGHT WINDOW OF 3 TO 11 FT SHOWN ABOVE.

	<p>City of Bremerton</p> <hr style="border: 1px solid black;"/> <p>PUBLIC WORKS</p> <hr style="border: 1px solid black;"/> <p>ENGINEERING DIVISION</p>	<p>DRIVEWAY AND INTERSECTION SIGHT TRIANGLES</p> <p style="font-size: small;">Alteration of this drawing is prohibited. Any approval of an altered drawing is unauthorized and void.</p>	<p>3123</p> <hr style="border: 1px solid black;"/> <p style="font-size: x-small;">Revision Date 8/15/08</p>
---	---	---	--